


# BEGA UPLIGHT

fra 2 - 5 tons (belægning)



VM Flag & Stænger A/S

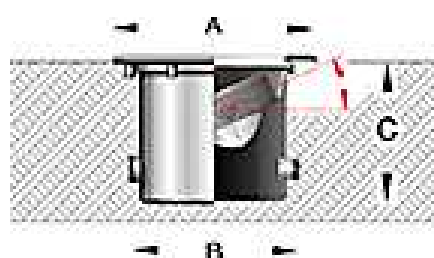



## **Drive-over in-ground floodlights**

Floodlights with **adjustable** light distribution

Protection class IP 68 10 m

Pressure load **2000 kg** Installation depth **165 - 225 mm**

In-ground floodlights for

· discharge lamps HIT-TC-CE

8700 · 8650 - Lampholder GU 6.5

Cover ring and luminaire housing made of stainless steel

Safety glass · Reflector

Built-in infrared filter

2 cable glands for connecting cable  $\varnothing$  9 -15 mm

2.5 connecting terminals

Slope angle of the reflectors adjustable from  $0^\circ$  -  $30^\circ$ .

The optical system can be rotated  $\pm 180^\circ$  around the vertical axis of the luminaire.

Light distribution is adjusted to meet the requirements of the lighting situation.

8650 · 8700 with electronic ballast

8650 · 8651 narrow light beam · with built-in louvre

Glass surface temperature (T) measured according to EN 60598 at an ambient temperature of  $t_a$   $15^\circ\text{C}$

We supply any luminaire with this skid-blocking glass which is denoted by **R** after the article number.

The light distribution is more broad spread when this type of glass is used.

**Pris kr. 9.950,- inkl. lyskilde, ekskl. moms**